

580-605W

SUBSTRATE
GLASS ●
MESH GLASS ●

FRAME TYPE
ALUMINIUM ●
STEEL ●

FRAME VARIANT
SILVER ●
BLACK ●

MAXIMUM EFFICIENCY %

23.42

CELL TYPE


M10R HALF CUT

PRODUCT WARRANTY

12 YEARS

PERFORMANCE WARRANTY

30 YEARS

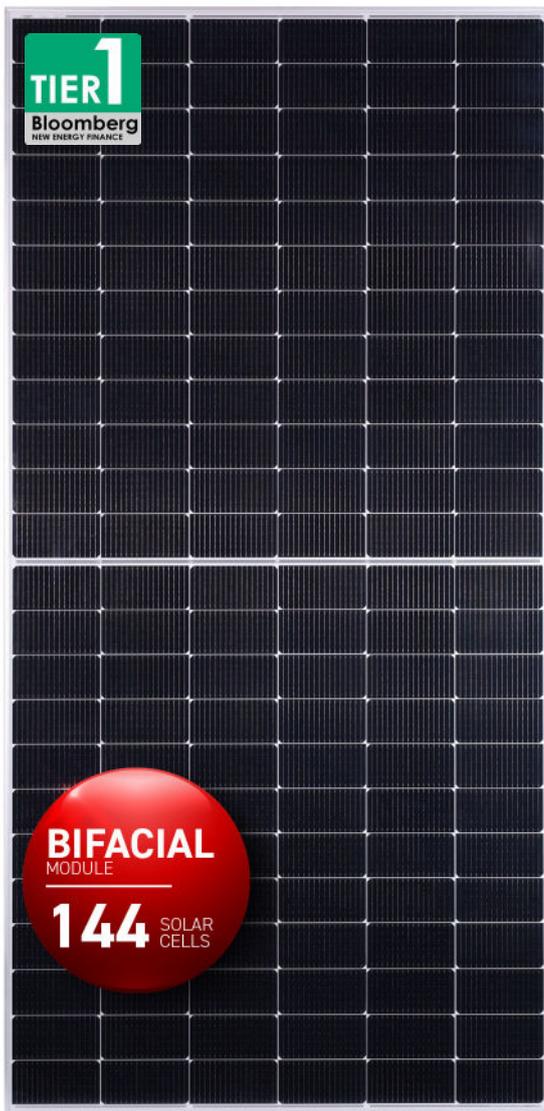

0% NEGATIVE POWER TOLERANCE

- Positive power tolerance of upto 0 ~ 4.99Wp
- Module I_{mp} binning radically reduces string mismatch losses



IMPROVED LONGEVITY

- Excellent anti-PID performance via optimized process and materials control
- Lower susceptibility to LID & LeTID



LOWER LCOE

- Lower balance of systems cost
- Improves value proposition of the product with competitive ROI



HIGHLY AUTOMATED PRODUCTION LINE

- Multi stage EL and digitalised visual inspection results lower defect rates
- Implemented engineering excellence ensures top notch quality



SUPERIOR HAIL TEST PERFORMANCE

- ø 45mm hail test passed from third party laboratory with impact velocity up to 27m/s

PRODUCT CERTIFICATES



SYSTEM CERTIFICATES

IEC 61215 : 2021, IEC 61730, UL 61215, UL 61730, IS 14286, IS/IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68, CAN-CSA

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION:

- ISO 9001:2015/ Quality Management System
- ISO 14001:2015/ Environmental Management System
- ISO 45001:2018/ Occupational Health and Safety Management System
- SA 8000 :2014/ Social Accountability International

THIS DATASHEET IS APPLICABLE FOR: HYPERSOL VSM DH.72.AAA.05 (AAA=580-605)

ELECTRICAL PARAMETERS | STC^{1,2}

Parameter	580	585	590	595	600	605
Peak Power P_{max} (Wp)	580	585	590	595	600	605
Maximum Voltage V_{mpp} (V)	43.6	43.8	44	44.2	44.4	44.6
Maximum Current I_{mpp} (A)	13.31	13.37	13.43	13.48	13.54	13.6
Open Circuit Voltage V_{oc} (V)	52	52.2	52.4	52.6	52.8	53
Short Circuit Current I_{sc} (A)	14.2	14.26	14.32	14.38	14.44	14.5
Module Efficiency (%)	22.45	22.65	22.84	23.03	23.23	23.42

¹STC: 1000W/M² IRRADIANCE, 25°C CELL TEMPERATURE, AM1.5G SPECTRUM ACCORDING TO EN 60904-3 | ² TOLERANCE OF RATING AT STC ($P_{max} / I_{sc} / V_{oc}$) [%]: 0-3/+5/+5 | ELECTRICAL MEASUREMENT UNCERTAINTY IS WITHIN ± 2%

ELECTRICAL PARAMETERS | NOCT³

Parameter	437.9	441.8	445.7	449.4	453.6	457.38
Peak Power P_{max} (Wp)	437.9	441.8	445.7	449.4	453.6	457.38
Maximum Voltage V_{mpp} (V)	40.4	40.7	40.8	41	41.2	41.39
Maximum Current I_{mpp} (A)	10.83	10.86	10.92	10.97	11.01	11.06
Open Circuit Voltage V_{oc} (V)	49	49.1	49.3	49.5	49.7	49.86
Short Circuit Current I_{sc} (A)	11.46	11.51	11.56	11.6	11.65	11.7

³ NOCT IRRADIANCE 800 W/M², AMBIENT TEMPERATURE 20°C, WIND SPEED 1 M/SEC

ELECTRICAL PARAMETERS | BNPI^{4,5}

Parameter	643	648	654	659	665	670
Peak Power P_{max} (Wp)	643	648	654	659	665	670
Maximum Voltage V_{mpp} (V)	43.6	43.8	44	44.2	44.4	44.6
Maximum Current I_{mpp} (A)	14.75	14.81	14.88	14.94	15	15.07
Open Circuit Voltage V_{oc} (V)	52	52.2	52.4	52.6	52.8	53
Short Circuit Current I_{sc} (A)	15.73	15.8	15.87	15.93	16	16.07

⁴ BNPI: 1000W/M² φ₁₃₅, BIFACILITY COEFF. (φ) AT BNPI P_{max} , I_{sc} IS 75±5% & FOR V_{oc} IS 99±10%, AM 1.5, 25°C | ⁵ TOLERANCE OF RATING AT BNPI ($P_{max} / I_{sc} / V_{oc}$) [%]: 0-3/+10/±10

TEMPERATURE COEFFICIENTS (Tc) PERMISSIBLE OPERATING CONDITIONS

Tc of Open Circuit Voltage (β)	-0.26%/°C
Tc of Short Circuit Current (α)	0.046%/°C
Tc of Power (γ)	-0.30%/°C
Maximum System Voltage	1500V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C

MECHANICAL DATA

Length × Width × Height	2278 X 1134 X 30 mm (89.68 x 44.65 x 1.18 inches)
Weight	31.6 ± 5% Kg (69.67 lbs)
Junction Box	IP 68, Split Junction Box with individual bypass diodes
Cable & Connectors [#]	200 mm (+ve terminal) and 300 mm (-ve terminal) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate [#]	2.0 mm (0.098 inches) high transmission ARC Semi-tempered glass (low iron content)
Cells	72 (144 half-cells) N-TYPE bifacial solar cells
Substrate	2.0 mm (0.098 inches) high transmission heat strengthened glass/ mesh glass [#] (low iron content)
Frame	Anodized aluminium/ Alloy steel frame [#]
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Cell Encapsulant	EPE/ EVA
Maximum Series Fuse Rating	30A
Hail Test [*]	Ø 45mm Impact Velocity up to 27m/s


WARRANTY

Product Warranty ^{**}	12 years
Performance Warranty ^{**}	Linear Power Warranty for 30 years with 1% for 1 st year degradation and 0.4% from year 2 to year 30


CAUTION: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order. Vikram Solar and all its accompanying logos are trademarks of Vikram Solar Limited registered in India.

DIMENSIONS IN MM

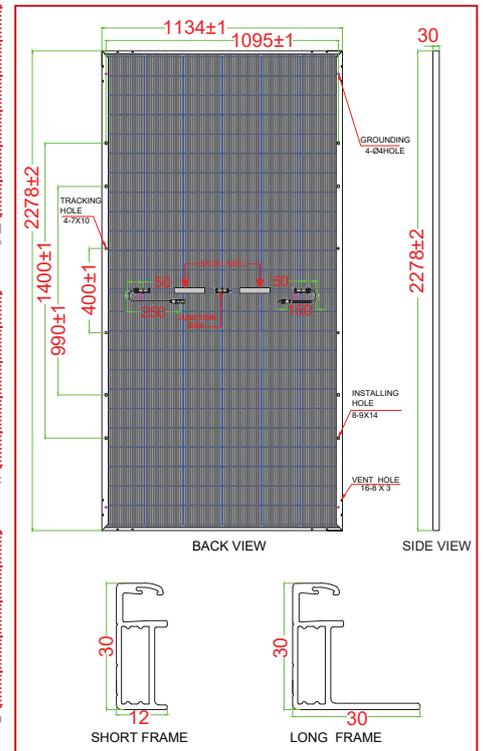


TYPICAL I-V CURVES⁶

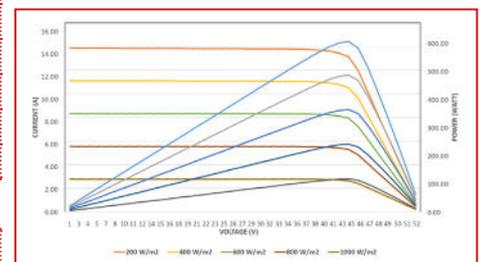

⁶ AVERAGE RELATIVE EFFICIENCY REDUCTION OF 5% AT 200 W/M² ACCORDING TO EN 60904-1

PERFORMANCE WARRANTY

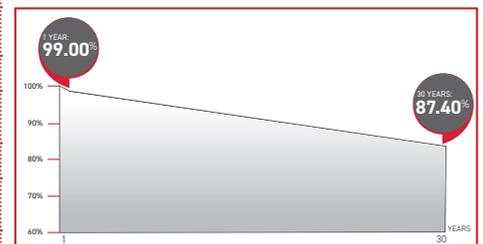

PACKAGING INFORMATION

Quantity /Pallet	36
Pallets/Container (40'HC)	20
Quantity/Container (40'HC)	720

^{*}All (*) certifications under progress. | ^{**}Refer to Vikram Solar's warranty document for terms and conditions. | [#]400mm(15.75 inches), 1000mm(39.37 inches), 1200mm (47.24 inches) cable lengths are also available | [†]Anti-glare Glass is also available | ^{††}As per applicable product | ^{†††}With additional Cost & Lead Time subject to availability | STC: Standard Testing Condition | BNPI: Bifacial Nameplate Irradiance | NOCT: Nominal Operating Cell Temperature